



## FIRE DETECTION SYSTEM

ISO9001

CE QACE202401069

# NFC-500MCP / NFC-500MCPX CONVENTIONAL MANUAL CALL POINT SERIES

## PRODUCT OVERVIEW

### MODEL: NFC-500MCP \ NFC-500MCPX

NEVERFIRE Conventional Manual Call point has been designed to operate on conventional fire detection systems. NEVERFIRE manual call points are available in two versions Single Action Manual Call point (NFC-500MCP) & Dual Action Manual Call Point (NFC-500MCPX)

## DESCRIPTION

NFC-500MCP / NFC-500MCPX Manual Call Points are critical devices in fire alarm systems and are subject to strict regulations and standards to ensure their effectiveness in emergency situations.

These standards govern everything from their design and installation to testing and maintenance, ensuring that MCPs function reliably when needed.

NFC-500MCP / NFC-500MCPX Manual call points satisfies the requirements for a manual fire alarm initiating device. With its sleek and double design. It is easily observed yet does not hinder with building design and can be fitted along corridors, hallways and exits for easy access to operate in cases where there is a requirement for activating an alarm signal.

NEVERFIRE MCP's are resettable manual call points unique and innovative features. They have been designed to obtain maximum visibility, high reliability in operation and pleasant aesthetical appearance.

NEVERFIRE MCP's design widely applies to all kinds of industrial and commercial constructions with its high resistance to humidity, wide operating temperature range, high reliability and ease of installation.

NFC-500MCP \ NFC-500MCPX Manual call points has been designed to EN54-11.

NEVERFIRE MCP's certified CE QACE20241069 <sup>(1)</sup> which play a vital role in ensuring that NEVERFIRE products placed on the market of the world are safe. NEVERFIRE certified ISO9001:2015<sup>(1)</sup> Quality management systems and requirements, which is global standard for trusted goods and services.

## FEATURES


- √ Quick fire alarm transfer.
- √ High performance at low cost.
- √ Easy to install.
- √ Suitable for indoor use.
- √ Designed for fast and easy installation.
- √ Durable Design.
- √ East operation-push to activate.
- √ With protective cover (NFC-500MCPX).
- √ Screw terminals for wiring connections.
- √ Requires a special key to reset the call point.



NFC-500MCP  
Single Action



NFC-500MCPX  
Dual Action



NEVERFIRE APPROVALS		PRODUCT COMPLIANCE	

(1) you can view & download these certificates from ASSS website [www.asss-eg.com](http://www.asss-eg.com)

©2025 ASSS com., The company reserves the right to change the specifications of the products at any time and without prior notice.

All information in this documents is given in good faith but ASSS com. Cannot be held Responsible for any omissions or errors. Printed in Egypt.

Issue: 001

Date: 2025/01/08

Page: 1 of 3

AL ALAMIA FOR SAFETY & SECURITY SYSTEMS COM. (ASSS)

Factory: 16C, south industrial Zone, 10th of Ramadan City, Sharkya, Egypt.

Administration: No.6, 163 St, Behind the military hospital, El Maadi, Cairo, Egypt.

TEL.: +2 02 25249113

FAX.: +2 02 25281778

Mobile: +2 01129277269

E-Mail: [info@asss-eg.com](mailto:info@asss-eg.com)

[www.asss-eg.com](http://www.asss-eg.com)

ASSS FACTORY is the first manufacture for fire alarm system in Africa & middle east.

The com. established since 2011 located in cairo governorate while the factory located in Sharkya governorate.



**NFC-500MCP / NFC-500MCPX**  
**CONVENTIONAL MANUAL CALL POINT SERIES**

TECHNICAL SPECIFICATIONS		
Model	NFC-500MCP	NFC-500MCPX
Operation	Single Action	Dual Action
Operating Voltage	24VDC (16VDC – 28VDC)	
Standby Current	0mA	
Alarm Current	≤ 30mA	
Type of initiating Part	Reusable	
Initiating Mode	Pressing the operating element manually	Lift the cover then Pressing the operating element manually
Reset Mode	Rest by a special key	
Fire Alarm Indicator	Red. It is off normally and illuminates under fire condition	
Wiring	Two – wire	
OPERATING CONDITION		
Type	Indoor	
Operating Temperature	0°C ~+55°C	
Storage Temperature	-10°C - 60°C	
Relative Humidity	≤95% non-condensing	
MECHANICAL SPECIFICATIONS		
Weight	125g	130g
Ingress Protection Rating	IP43	
Dimension	88W x88H x50D mm	
Material	ABS (Fire Proof Plastic)	
Color	Red	
Packaging	90Unit\Carton	
Carton Dimensions	55*33*38cm	


**OPERATION**

NFC-500MCP, this Single Action call point use a push-button mechanism to trigger the alarm, Pushing the button sends a signal directly to the fire alarm system, Its Simple to use and often less expensive than other types while NFC-500MCPX Dual Action require two separate actions to activate the alarm, reducing the chances of accidental triggers, the user must lift the cover before pressing the operating element, here we summarize the reset operation process for NEVERFIRE Manual Call Points: (1) Insert key into reset barrel (2) turn key clockwise (3) the flag retracts (4) operating element springs forward

Each type of manual call point offers distinct advantages depending on the specific environment and safety requirements. Although break glass models are widely used for their simplicity, the resettable versions is favored for easy of maintenance and reusability.

Key-operated and double action call points provide added security, making them ideal for areas prone to misuse or accidental activation.

Operation

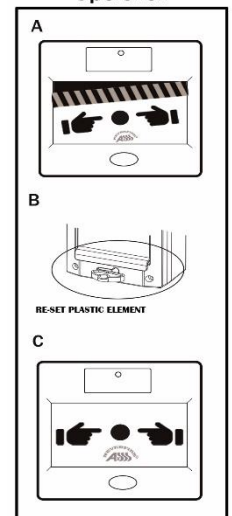

©2025 ASSS com., The company reserves the right to change the specifications of the products at any time and without prior notice.

All information in this documents is given in good faith but ASSS com. Cannot be held Responsible for any omissions or errors. Printed in Egypt.

Issue: 001

Date: 2025/01/08

Page: 2 of 3

**AL ALAMIA FOR SAFETY & SECURITY SYSTEMS COM. (ASSS )**

**Factory:** 16C,south industrial Zone,10th of Ramadan City, Sharkyia, Egypt.

**Administration:** No.6, 163 St, Behind the military hospital, El Maadi, Cairo, Egypt.

**TEL.:** +2 02 25249113

**FAX.:** +2 02 25281778

**Mobile:** +2 01129277269

**E-Mail:** info@asss-eg.com

**www.asss-eg.com**

**ASSS FACTORY** is the first manufacture for fire alarm system in Africa & middle east.

The com. established since 2011 located in cairo governorate while the factory located in Sharkyia governorate.



**FIRE DETECTION SYSTEM**


ISO9001

CE QACE202401069


# NFC-500MCP / NFC-500MCPX

## CONVENTIONAL MANUAL CALL POINT SERIES

### INSTALLATION

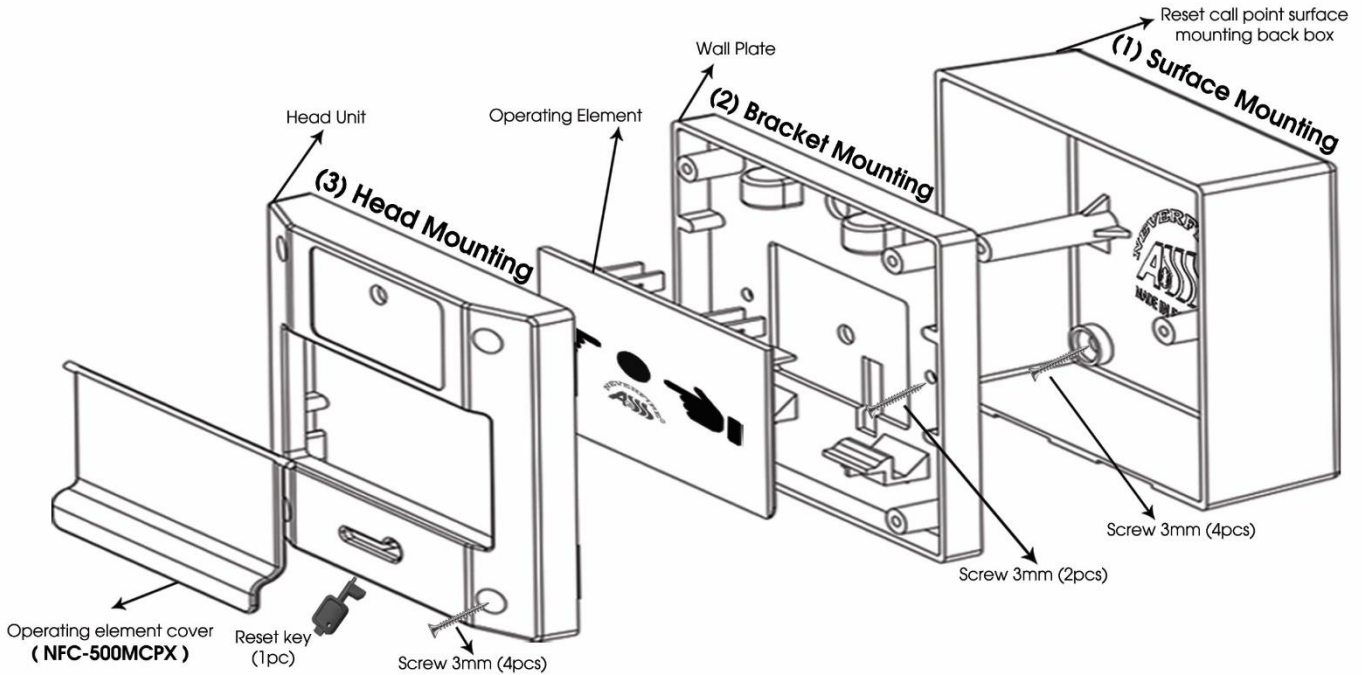

### PRODUCT DETAILS

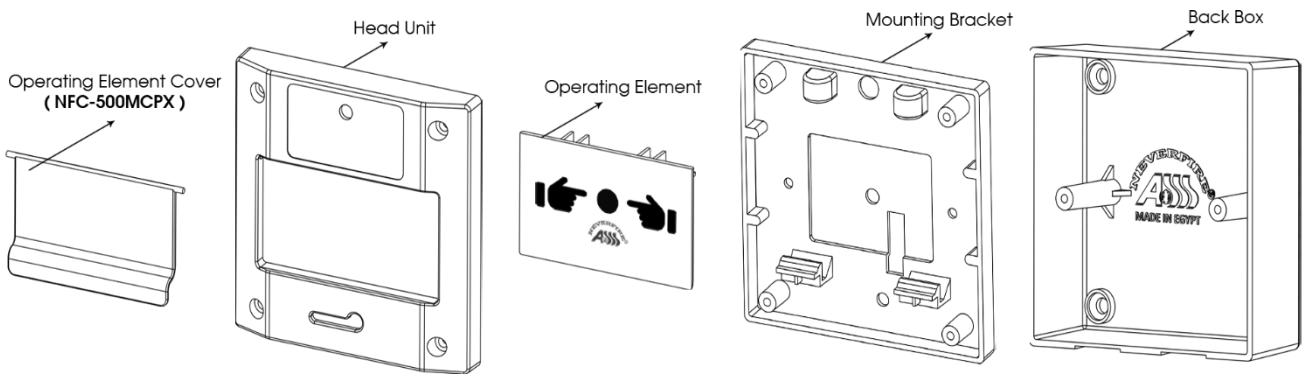

### WARRANTY

NEVERFIRE warrants that product from defects in design, materials and workmanship during the warranty period ensuring customers' confidence in product quality and performance.

For comprehensive information, including installation guidelines and compatibility details, please consult NEVERFIRE Installation Manual or reach out to our technical support team. Anybody, including the agents, distributors or employees, is not in the position to amend the contents of this warranty.



- 1-LED Illuminates red when manual call point is pressed.
- 2-Use suitable cable glands for required Ingress Protection Rating.
- 3-For additional protection against accidental operation, you can use Transparent Hinged cover.

©2025 ASSS com., The company reserves the right to change the specifications of the products at any time and without prior notice. All information in this documents is given in good faith but ASSS com. Cannot be held Responsible for any omissions or errors. Printed in Egypt.

Issue: 001

Date: 2025/01/08

Page: 3 of 3

**AL ALAMIA FOR SAFETY & SECURITY SYSTEMS COM. (ASSS )**  
**Factory:** 16C,south industrial Zone,10th of Ramadan City, Sharkyia, Egypt.  
**Administration:** No.6, 163 St, Behind the military hospital, El Maadi, Cairo, Egypt.  
**TEL.:** +2 02 25249113 **FAX.:** +2 02 25281778 **Mobile:** +2 01129277269  
**E-Mail:** info@asss-eg.com **www.asss-eg.com**

**ASSS FACTORY** is the first manufacture for fire alarm system in Africa & middle east.  
 The com. established since 2011 located in cairo governorate while the factory located in Sharkyia governorate.